



Extract of applications

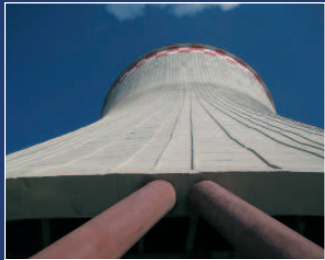

Cooling Towers

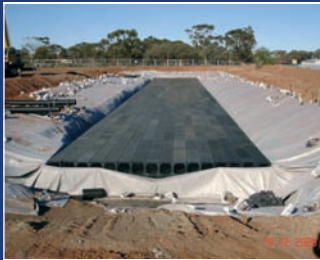

Stormwater




Coolpads



Elastic sportfloors



Water treatment

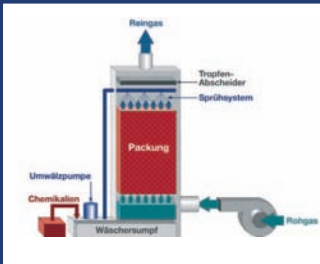

Air treatment



Fluoropolymers



Tool construction



Headquarters in Ochtrup

Hewitech GmbH & Co. KG
Am Langenhorster Bahnhof 16
48607 Ochtrup
Deutschland

Telefon +49 2553 970260
Fax +49 2553 970265
info@hewitech.de
www.hewitech.de

Hewitech Polska Sp. z o.o.
Ul. Polczynska 67A
75-816 Koszalin
Poland

Telefon +48 94 342 48 31
Fax +48 94 342 51 95
biuro@hewitech.pl



Sc Hewirotech Srl
Str. Depozitelor Nr. 4 Cam. 2
Targu Mures
Romania

Telefon +40 731 336571
Fax +40 265 227069
hewirotech@gmail.com

hewitech
INNOVATION IN PLASTIC




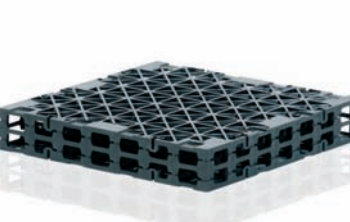




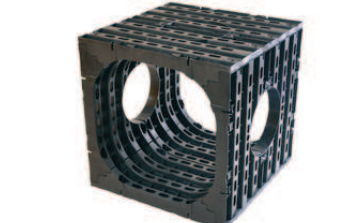




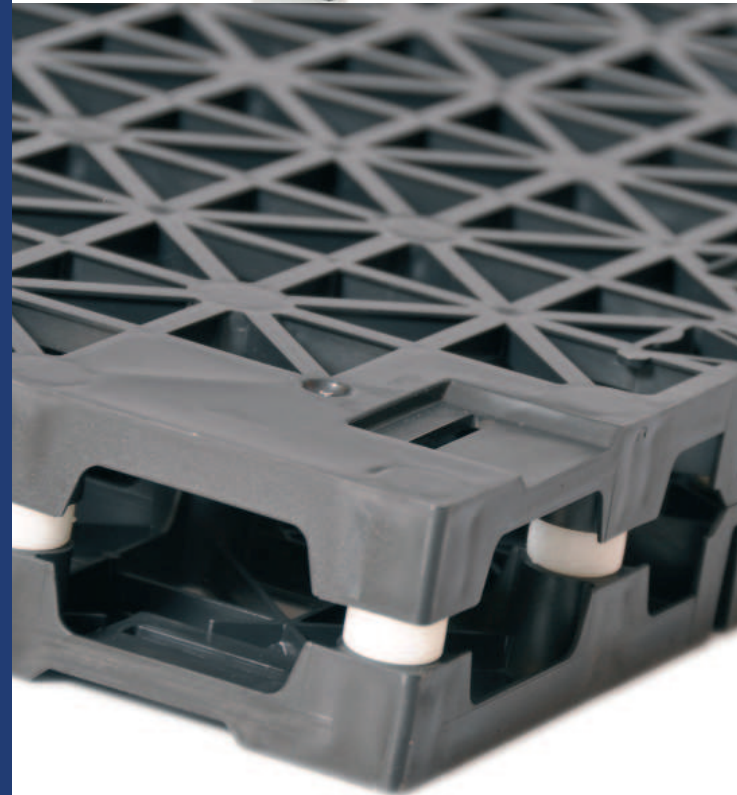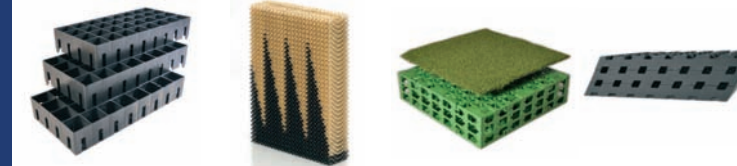






hewitech
INNOVATION IN PLASTIC

Complex requirements demand
intelligent solutions



We are ready.

General product overview

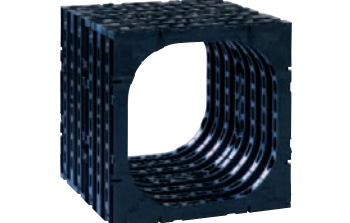				
<p>VC25 splash fill with lowest drop pressure</p>	<p>DEP 156 droplet eliminator profile, PP or PVC</p>	<p>Coolpad AK150 low energy cost, cleaned by KÄRCHER</p>	<p>VarioBox 100 drainage element for FIFA-soccer fields, hockey, rugby</p>	<p>Elastic Floor EF sportsfloor with elastic elements</p>
				
<p>NC20 highest performance, up 3 m modul length</p>	<p>DE125 drift losses < 0.0005%, in PP, EUROVENT cert.</p>	<p>CF12-F wall element for dust removal in PP</p>	<p>Treebox protection of streets and roots</p>	<p>Grasspaver 100 traffic load for trucks, roadside protection</p>
				
<p>NB25 lowest fouling</p>	<p>AI 635 effect. AirInlet modul in PP</p>	<p>LA85 Lamellas for water & potable water</p>	<p>VarioBox stormwater retention with tunnel element, variable heights</p>	<p>Grasspaver 300 stormwater filter zone, different heights, load distribution</p>
				
<p>VF20 cellular fill with vertical channels</p>	<p>CF12, 19, 27 cellular fills in PP / PVC (100-240m²/m³)</p>	<p>FA12, 19, 27 coalescence filter element, PP</p>	<p>CONTROLBOX stormwater retention with 500mm opening</p>	<p>Fluoropolymers no UV-attack, no biofouling, up to 260°C</p>